



Vehicle Route Prediction through Multiple Sensors Data Fusion

Ali Nawaz*¹, Attique Ur Rehman¹, Muhammad Tahir Ali², Muhammad Abbas¹

¹CEME, NUST, ²GUST, KUWAIT

Abstract - Vehicle route prediction is one of the significant tasks in vehicles mobility. It is one of the means to reduce the accidents and increase comfort in human life. The task of route prediction becomes simpler with the development of certain machine learning and deep learning libraries. Meanwhile, the security and privacy issues are always lying in the vehicle communication as well as in route prediction. Therefore, a framework which will reduce these issues in vehicle communication and predict the route of vehicles in crossroads is proposed. Specifically, our proposed framework consists of two modules and both are working in sequence. The first module of our framework using a deep learning for recognizing the vehicle license plate number. Then, the second module using supervised learning algorithm of machine learning for predicting the route of the vehicle by using velocity difference and previous mobility patterns as the features of machine learning algorithm. Experiment results shows that accuracy of our framework.

Keywords: Machine learning; Supervised learning; Intelligent transportation

INTRODUCTION

The aim of artificial intelligence (AI) is to make the human life more comfortable and reduce the effort of human to perform certain tasks. Vehicle driving is one among those tasks where human put maximum effort to reach his destination. From last two decades, scientist researching in this field and have achieved good results but still there are some risks and issues involved. Traditionally, there are two types of research aspects in this field first is making autonomous or driver less vehicle (Mladenovic et al., 2013) and second is making complete network among the vehicles (Wang et al., 2007) where vehicles share their routes knowledge among them. When we talk about the autonomous vehicle there are lot of problems associated with it. The foremost problem with autonomous vehicle is privacy (Glancy et al., 2012) as autonomous vehicle requires the connection between your own vehicle and personal devices like smart phone that is how it will be able to manage your schedule and make intelligent decisions now the privacy question rise here is that autonomous vehicle might store your daily route information, your daily schedule and location you visits someone might steal these information for achieving wrong goals or companies purchase your information to provide advertisement of their products. The second and most important problem in autonomous vehicle is hacking (Day et al., 2019) as autonomous vehicle require continuous internet connection to communicate and for path detection and any devices that are connected via internet is always at risk of being hacked someone might hack the information of autonomous vehicle and provide wrong route information which will disturb the communication between vehicle and cause an accidents also autonomous vehicle require your personnel bank account information like bank account number and ATM pin etc. someone might hack these information and make you bankrupt.

Privacy is the major issue in vehicle Adhoc network (VANET) (Do'tzer et al.) as in VANET vehicles shares their routes knowledge among them someone might use these knowledges to achieve his bad objectives. Security is also the important concern in VANET someone might hack the networking between vehicles and provide wrong route information which will be the cause of an accidents (Raw et al., 2013). The vehicle driving is always a risky task either you are holding the steering wheel or walking on your feet on the road the chance to meet unfortunate accidents are always there. If there are some unfortunate accident took place then who is responsible for it whether autonomous vehicle

*Corresponding author:

Email: alinawaztanoli097@gmail.com (A. Nawaz)

iKSP Journal of Computer Science and Engineering (2021) 1(2): 1-8



itself, manufacturer of autonomous vehicles or internet distributed companies? (Douma et al., 2012) That is why, an importance of human being in autonomous can't be ignored.

When the vehicles reach the crossroad, it is difficult for cross vehicles to understand that whether opposite vehicle is going to change its route or not i.e., either it is going to take turn or going straight. For example, as shown in Figure 1, C1 is one vehicle and is travelling on the right side of road as well as travelling along the one side of crossroad and C3 is another vehicle and travelling along the left side of road which is on the other side of crossroad now it is difficult for C1 to understand whether the C3 is going to take turn or travelling in same route and vice versa.

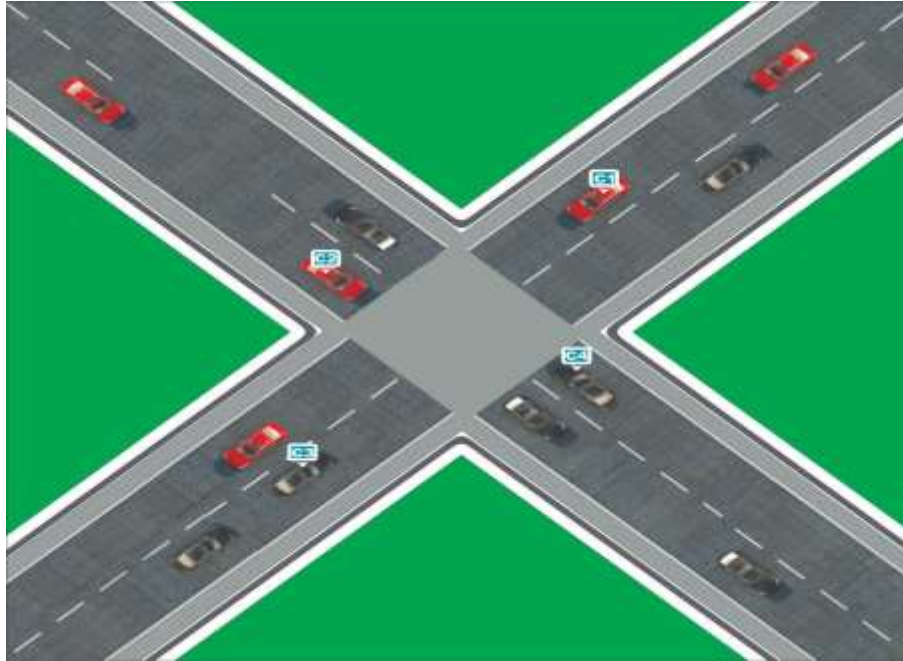


Figure 1. Illustration of the problem statement.

These are some major issues associated with route prediction in autonomous vehicles and vehicle communication. Now, in order to overcome these issues in route prediction a system which will combine both machine learning (Mitchell et al., 1997) for making prediction on the basis of certain features and deep learning for detecting the license plate number of vehicles is proposed. With the development of advance sensors such as digital camera and deep learning (LeCun et al., 2017) libraries like Keras and TensorFlow nowadays our problems of computer vision are become simpler with more accuracy that is why a deep learning for detecting and recognizing the license plate number of target vehicles is utilized. Then a machine learning technique is used to predict whether vehicle travels straight path or make turn in crossroad. In order to achieve this goal of prediction we will use radar gun for velocity detection and global positioning system (GPS) for detection of previous mobility patterns.

Because of aforementioned limitation of autonomous vehicle and VANET a system which is neither fully autonomous nor fully control by humans is used our proposed system will involve both human intelligence (H.I) and A.I in order to maximize the accuracy of vehicle driving as well as route prediction which in turn results in reducing the probability of the accidents.

H.I + A.I = More Accuracy in driving

Our proposed system representing in Figure 2 detects vehicle license plate number by using camera and recognize it by using deep learning technique after recognizing our proposed system check for license number in database repository if database repository does not contain the database of specified vehicle then terminate the remaining process otherwise send the control to the basic processing unit which will send frequency to the target vehicle in order to measure velocities afterward output of velocities difference is send to the basic processing unit (B.P.U) to predict route of the vehicle. The major contributions of our research paper are summarized as follows.

Proposed a method for measuring the difference of speeds and taken it as a feature for machine learning algorithm

Proposed efficient system for crossroad route prediction

Reduce the probability of the accidents and overcome the issues of autonomous vehicles and VANET

The rest of the paper is divided into four sections which are organized as follows. Section II will present related work. In section III we will describe our proposed method in details and Section IV contain our experiment. The V and final Section concludes our research paper.

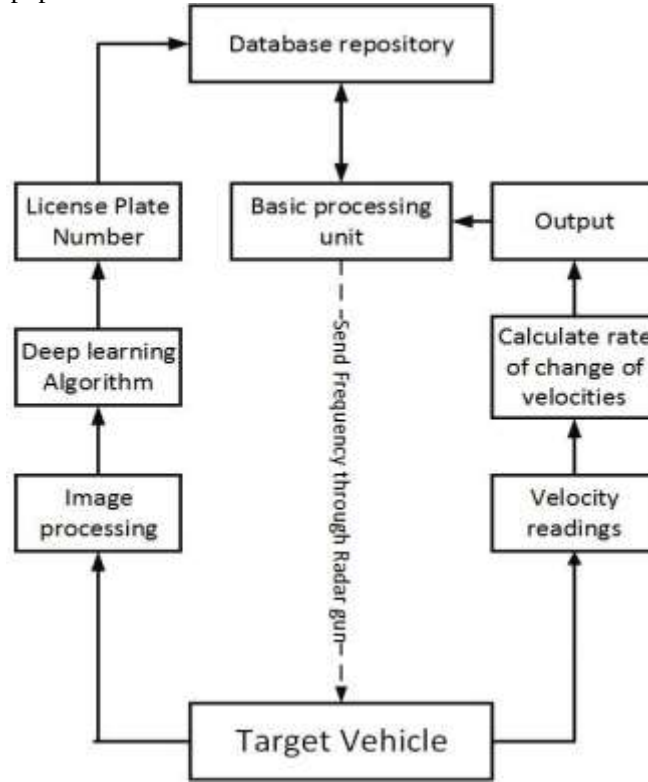


Figure 2. Architecture of proposed system

RELATED WORK

When we look into the literature of vehicle route prediction there are two most commonly used techniques for predicting the routes first is by analysing the driver intentions and previous behaviour while second is by making the future trajectory of the targeted vehicles. Both techniques have their own pros and cons. We will review both techniques with their known limitation summarized in Table 1. (Simmons et al., 2006), proposed a statistical model for predicting the route of vehicle based on hidden Markov model (HMM) (Rabiner et al., 1993). The probabilistic model predicts the intent of driver by previous route history data of the route followed by vehicle driver obtained via GPS. The basic idea is to assemble data on each route a driver takes and to invigorate the truthful model based on that experience. The model is then used, on-line, to anticipate driver plan for the accompanying route, after which that trip is used to, eventually, update the model. Instead of predicting the route the model put focus on the predicting the behavior of the vehicle driver. J. Krumm present an algorithm (Krumm et al., 2010) for turn prediction of the vehicle drivers. This algorithm is simply based on the fact that driver likely to take turn which take short time and resources to his destination. The accuracy of the proposed algorithm increases by using more representation of destination.

Similarly, J. Krumm proposed an algorithm for predicting the short-term route of vehicles drivers by means of Markov model (Krumm et al., 2016). In this algorithm he actually makes the prediction by training the model on previous long-term route history data of vehicles drivers obtained by GPS. The proposed algorithm divides route into n segments where n ranges from 1 to 10 and predict 90 percent accuracy for first individual segment and accuracy consistently decreases with each next number of segments. The only limitation of this algorithm is the distance as each next segment prediction is limited to 237.5 meters. Then in order to eliminate segmentation limitation as well as to predict the route of the vehicles based on the previous route history (Froehlich et al., 2008) proposed an algorithm. The proposed algorithm made the prediction by comparing the current trip of vehicle by previous route knowledge of the same vehicle. The only feature use in this algorithm is previous route history obtained by GPS data due to which accuracy of the prediction varies and, in some cases, decreases up to 50 percent.

G. Xue et al. proposed Variable-order Markov Models (VMMs) for analysing and predicting the short-term route prediction based on the data collected from Shanghai taxis. The prediction accuracy of proposed method increases with the increasing in available data. The proposed approach is centralized which results in bad scalability when number of vehicles increases.

(Wiest et al., 2012) proposed a probabilistic trajectory prediction approach based on Gaussian mixture model. The proposed approach achieves this task in two seconds advance by concluding the joint probability distribution obtained by previous mobility patterns. The idea behind the approach is to gain motion model from the recently observed trajectories and make prediction of the future trajectories. The proposed method not only make prediction but also make statistical distribution of the future trajectories. Although the proposed approach is trained on 1200 trajectories and evaluated on 21 test trajectories the accuracy is pretty efficient but the only limitation is the future prediction time two seconds which is not appropriate for decision making.

(Houenou et al., 2012) proposed the method for the predicting the trajectory of the vehicle. The proposed method predicts the new trajectory by combining the prediction of trajectory obtained via Constant Yaw rate acceleration motion model (CYRA) and trajectory of prediction obtained by maneuverer recognition. The maneuverer is totally related to the route of the vehicle. The lane objective is to detect and exploits the present resemblance between the method for the vehicle under consideration and the point of convergence of the lane. The CYRA model is mathematical model which is obtained by integrating the velocities. The pre-processing is obtained by performing a Kalman filter with a CYRA motion model for the purpose of prediction. Although proposed method works on combination of multiple trajectories, the accuracy of proposed method is bad for longer term prediction and non-monotonic movement as well.

Similarly, (Yao et al., 2012) proposed a method to detect the change of lane trajectory by gathering and analysing different driver's data. The proposed method produces good accuracy of detecting any usual driver lane change behaviour. The only problem of this approach is the limitation of trajectories set used as compared to the traditional trajectory approach.

There are two ways of detecting the object; first is discriminative and other is generative methods (Wu et al., 2012). In discriminative, first we detect all object in image or frames of the video and after that re-distinguish them to extend a follow associating a similar object. The generative method generates the complete model of the object with the goal of making correlation between the images and the model, which enhances the exactness of the matching. We will use discriminative approach to detect license plate of the vehicles which is character as well as object detection and recognition task. The most prominent approach of route prediction is traditional vehicle route prediction used by autonomous vehicle (Sadigh et al.; Malik, et al., 2021) in which vehicle predict others vehicle future trajectories but due to early mentioned cons of autonomous vehicle we should not completely relying on this technique. Another method to predict the route of the vehicles is using the navigation information (Lee et al.).

The Proposed Method

The proposed method is discussed in detail later but first let's discuss the purpose and working of B.P.U

Basic processing unit

Our basic processing unit shown in Figure 3 is composed of three sub modules which are responsible for following mentioned tasks.

- Send frequency by radar gun for measuring velocity
- Machine learning algorithm for predicting route
- Display route prediction result to driver in order to make decision

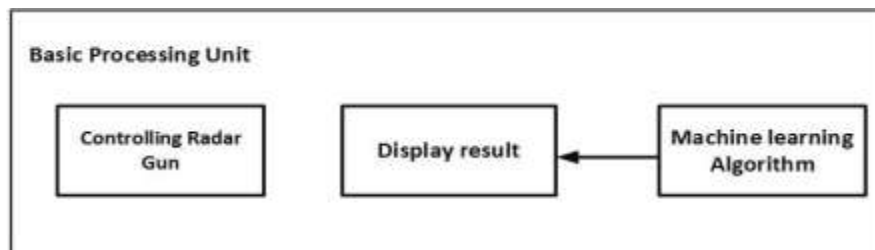


Figure 3. Submodules of B.P.U

Left hand side module is responsible for controlling the operation of radar gun for velocity measure. Right hand side module is responsible for predicting route based on machine learning technique and central module is responsible for displaying the prediction result.

Working of our proposed system

Our proposed method consists of two different modules but work together in a sequence. One module is for recognition of vehicle by its license plate or registration number and other is for predicting route based on machine learning technique. Our proposed system begins by detecting the license plate number of target vehicle by using camera and then recognize the plate number by using deep learning via tesseract. After recognizing the vehicle license plate number, it will check whether corresponding vehicle license number is registered in our database system or not. If it is registered in our database, then send the control to B.P.U otherwise terminate the whole prediction process. In B.P.U, radar gun control procedure sends some initial frequency and get first velocity reading $v1$ by using the formula

$$v1 = \Delta f1 / fo1$$

$$\text{where } \Delta f1 = fr1 - fo1$$

$fr1$ = first reflected frequency from target $fo1$ = first initial frequency we send from radar gun and after 3 sec later send another frequency beam and get second velocity reading $v2$

$$v2 = \Delta f2 / fo2$$

$$\text{where } \Delta f2 = fr2 - fo2$$

$fr2$ = second reflected frequency from target $fo2$ = second initial frequency we send from radar gun after getting the value of $v1$ and $v2$, calculate the rate of change of velocities by using the equation:

$$\Delta v = v2 - v1$$

The rate of change of velocity is taken as one of the features of machine learning for the task of route prediction as our task is supervised learning task in which we have features and labels. So, in this task our datasets are composed of two features; rate of change of velocity and previous mobility pattern data which are also stored in database repository. After getting rate of change of velocity Δv , we apply machine learning algorithm which will take rate of change of velocity and previous mobility patterns as features and label them with S for straight and T for turn depends on the features. At last, the result is displayed on screen and driver will decide whether to go straight or to take turn on the basis of prediction made by the system

Machine Learning Technique

As we mentioned earlier that our goal is to classify whether opposite vehicle will be going to change its route or not it means that our task is classification task of supervised machine learning. There are numerous machines learning algorithms which deals with classification problems. In order to solve machine learning problem, we use most prominent algorithms and experimental result reveals that decision tree classifier is accurate than other classification algorithm. The classification algorithms used are explained below;

K-nearest neighbor classifier

K-nearest neighbor is the simple and prominent machine learning algorithm widely used for classification problem of supervised learning. It finds the distance between test point with every point in the training data then find the k nearest neighbor for that training point (Friedman et al., 2001).

Table 1. Summary of Route prediction techniques

Source	Proposed Method	Advantage	Disadvantage
(Simmons et al., 2006)	Statistical model for predicting the route of vehicle based on hidden Markov model (HMM)	Anticipate driver plan for the accompanying route	Focus on predicting the behaviour of the vehicle driver
(Krumm et al., 2010)	Take the turn on the basis of driver shortest route to his destination	Accuracy increases with more representation of destination	
(Krumm et al., 2016)	Predicting the short-term route of vehicles drivers by means of Markov model	Predict 90 percent accuracy for first individual segment	Each next segment prediction is limited to 237.5 meters

(Froehlich et al., 2008)	Predict the route of the vehicles based on the previous route history obtained by GPS data	Eliminate the segmentation limitation of (Krumm et al., 2010)	Accuracy of the prediction decreases up to 50 percent
(Xue et al., 2009)	VMMs for analyzing and predicting the short-term route prediction	Accuracy increases with the increasing in available data	Poor scalability
(Wiest et al., 2012)	Probabilistic trajectory prediction approach based on Gaussian mixture model	Not only make prediction but also make statistical distribution of the future trajectories	Future prediction time is two seconds which is not appropriate for decision making
(Houenou et al., 2012)	Predict trajectory by combining the trajectory obtained via (CYRA) and trajectory of prediction obtained by maneuverer recognition	Work on combination of multiple trajectories	The accuracy of proposed method is bad for longer term prediction and non-monotonic movement as well
(Yao et al., 2012)	Method of detecting the change of lane trajectory	Good accuracy on few trajectories set	Doesn't work well for unusual driver behaviour
(Sadigh et al.)	Vehicle predict other vehicles future trajectories		Privacy and Security is the major risk
(Lee et al.)	Classify mobility based on the route prediction in VANET	The proposed scheme efficiently reduces handoff latency	Hacking and Privacy is the major risk involved in VANET

Naive Bayes Classifier

Naive Bayes is another most prominent, simple and widely used machine learning for solving classification task. It is based on the concept of conditional probability to classify the test data into predefined classes. Conditional probability is the probability that something will happens depends on conditions. let's consider two events A and B, then the conditional probability is defined as

$$P(A \text{ and } B) = P(A) * P(B - A)$$

Naive Bayes classifier locate the individual likelihood of each element and then select the component with highest likelihood.

Decision Tree Classifier

Decision tree is the class of supervised machine learning model that can be used both for classification and regression. In decision tree classification, we predict that every anticipation belong to the most usually occurring class of training perceptions in the area to which it belongs (James et al., 2018)

Datasets

Our machine learning datasets would be shown Table 2:

Table 2. Sample Dataset

Velocity Difference ΔV	Mobility patterns	Prediction
-3	1	Turn
0.1	0	Straight

It shows our datasets consist of two features one is velocities difference ΔV which shows the rate of change of velocities and other is previous mobility patterns (M.P) that means in past, vehicle change its route which is represented by 1 or going straight which is represented by 0. Prediction is the label of our datasets which might be straight which means our vehicle will go straight or turn which predict that vehicle will take turn

Experimentation

In this section we are going to present our experiment and results. Firstly, we will discuss the experiment performed to recognize the vehicle license plate number. Then, present our experiment of predicting the route of vehicle in crossroad. For license plate number we use tesseract v4 which is an open-source software for recognizing text and is based on deep learning LSTM algorithm (Tran et al., 2018). Our experiment is performed on Windows8.1 Pro 64-bit (6.3, build 9600) Intel(R)Core (TM) i3-400-5U @ 1.7GHZ (4 CPU's).

Vehicle license plate recognition

When the vehicle reaches cross road the surveillance camera attached to opposite vehicle come in action and detected the vehicle. After detection, we apply some basics image processing in order to extract the feature of image for recognizing. When detection and feature extraction is completed, we apply deep learning via tesseract to recognize the license plate number of the vehicle as shown in Figure 4.

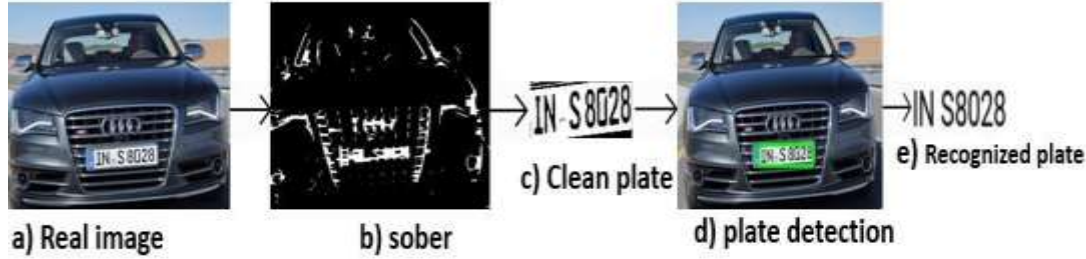


Figure 4. Recognition of license plate number

Prediction of Route

After recognition of vehicle license plate number, our proposed system checks whether corresponding license number is present in the database repository or not. If not present then terminate the whole prediction process otherwise send the control to the BPU. In this case, vehicle with this license plate number is present in the database that is why send BPU send the first frequency signal from radar gun and get $v1 = 65.5$ and after 3 seconds we send another frequency signal and get velocity $v2 = 65$ after getting both velocities we get the velocities difference $\Delta v = -0.5$.

Table 3. Evaluation metrics of decision tree algorithm

	precision	Recall	f1-score	support
S	0.98	0.96	0.96	1491
T	0.98	0.96	0.96	1508
micro avg	0.98	0.96	0.96	2999
macro avg	0.98	0.96	0.96	2999
weighted avg	0.98	0.96	0.96	2999

After getting velocities difference we take Δv as one of the features of machine learning algorithm while another feature is previous mobility pattern when we apply machine learning algorithms on these features and our system predict that vehicle is going to take turn evaluation results are shown in Table 3.

CONCLUSION

Due to certain disadvantages of autonomous vehicle, we proposed our own vehicle crossroad route prediction techniques based on machine learning and deep learning. The vehicle route prediction process is achieved by using machine learning techniques and in order to achieve this task get facilitation from deep learning by recognition of the vehicles license plate number. In our proposed method, the prediction of routes of only those vehicles are performed which are registered in our data repository. We predict the route of registered vehicles by using two features one is velocity difference and other is previous mobility patterns then apply decision tree algorithm on obtained features and predict whether vehicle will go straight or not. Due to limitation of resources, only two features are obtained and apply this technique on limited environment. Meanwhile, we use dummy data of previous mobility patterns for our research due non-availability of resources. Our future work will be focused on using more features for accurate prediction of all routes of every vehicle for whom our vehicle mobility might be affected and also use of high-power sensors for increasing the accuracy of our detection and prediction as well.

REFERENCES

- Brahim, R. M. S., M'hamed, H., Taleb, R., & Lemrabout, A. (2021). Load Frequency Control of Hybrid power System using Classical PID Controller. *iKSP Journal of Computer Science and Engineering*, 1(1).
- D. J. Glancy, Privacy in autonomous vehicles, *Santa Clara L. Rev.* 52 (2012) 1171.
- D. Lee, Y.-H. Kim, H. Lee, Route prediction based vehicular mobility management scheme for vanet, *International Journal of Distributed Sensor Networks* 10 (2014) 679780.
- D. Sadigh, S. Sastry, S. A. Seshia, A. D. Dragan, planning for autonomous cars that leverage effects on human actions., in: *Robotics: Science and Systems*.
- D. Tran, H. Mac, V. Tong, H. A. Tran, L. G. Nguyen, A LSTM based framework for handling multiclass imbalance in dga botnet detection, *Neurocomputing* 275 (2018) 2401–2413
- F. Doˆtzer, Privacy issues in vehicular ad hoc networks, *International Workshop on Privacy Enhancing Technologies*, Springer, pp. 197–209.
- F. Li, Y. Wang, Routing in vehicular ad hoc networks: A survey, *IEEE Vehicular technology magazine* 2 (2007).
- Fawaz, A., Ali, M. B., Adan, M., Mujtaba, M., & Wali, A. (2021). A Deep Learning Framework for Efficient High-Fidelity Speech Synthesis: StyleTTS. *iKSP Journal of Computer Science and Engineering*, 1(1).
- G. James, D. Witten, T. Hastie, R. Tibshirani, An introduction to statistical learning, volume 112, Springer (2013).
- G. Xue, Z. Li, H. Zhu, Y. Liu, Traffic-known urban vehicular route prediction based on partial mobility patterns, in: *2009 15th International Conference on Parallel and Distributed Systems, IEEE*, pp. 369–375.
- Haq, M.A.U., Jali, M. R. M., & Islam, G. M. N. (2017). Decision-making ability as a source of empowerment among rural women of Pakistan. *Global Social Welfare*, 4(3), 117-125.
- Houenou, P. Bonnifait, V. Cherfaoui, W. Yao, Vehicle trajectory prediction based on motion model and maneuver recognition, in: *2013 IEEE/RSJ International Conference on Intelligent Robots and Systems, IEEE*, pp. 4363–4369.
- J. Day, hacking, <https://www.johndaylegal.com/hacking-concerns.html>, (2019).
- J. Friedman, T. Hastie, R. Tibshirani, The elements of statistical learning, volume 1, Springer series in statistics New York (2001).
- J. Froehlich, J. Krumm, Route prediction from trip observations, *Technical Report, SAE Technical Paper* (2008).
- J. Krumm, A markov model for driver turn prediction (2016).
- J. Krumm, Where will they turn: predicting turn proportions at intersections, *Personal and Ubiquitous Computing* 14 (2010) 591–599.
- J. Wiest, M. Hoˆffken, U. Kreˆfel, K. Dietmayer, Probabilistic trajectory prediction with gaussian mixture models, in: *2012 IEEE Intelligent Vehicles Symposium, IEEE*, pp. 141–146.
- L. R. Rabiner, B.-H. Juang, J. C. Rutledge, Fundamentals of speech recognition, volume 14, PTR Prentice Hall Englewood Cliffs, (1993).
- Malik, H. A. M., Abid, F., Wahiddin, M. R., & Waqas, A. (2021). Modeling of internal and external factors affecting a complex dengue network. *Chaos, Solitons & Fractals*, 144, 110694.
- M. N. Mladenovic, M. M. Abbas, Self-organizing control framework for driverless vehicles, in: *Intelligent Transportation Systems-(ITSC), 2013 16th International IEEE Conference on, IEEE*, pp. 2076–2081.
- Nawaz, A., Haseeb, A., Malik, H. A., Ali, Q., & Malik, A. (2020). Genetic association among morphological traits of Zea mays seedlings under salt stress. *Biol Clin Sci Res J*, 21.
- R. S. Raw, M. Kumar, N. Singh, Security challenges, issues and their solutions for vanet, *International Journal of Network Security & Its Applications* 5 (2013) 95. F. Douma, S. A. Palodichuk, Criminal liability issues created by autonomous vehicles, *Santa Clara L. Rev.* 52 (2012) 1157.
- R. Simmons, B. Browning, Y. Zhang, V. Sadekar, Learning to predict driver route and destination intent, in: *2006 IEEE Intelligent Transportation Systems Conference, IEEE*, pp. 127–132.
- T. M. Mitchell, et al., *Machine learning*. wcb, (1997).
- Ul Haq, M. A., Malik, H. A., Akram, F., & Al Mutawa, E. K. (2020, December). Monetary Benefits of Solar Energy for Smart Cities Development. In *2020 International Conference on Innovation and Intelligence for Informatics, Computing and Technologies (3ICT)* (pp. 1-5). IEEE.
- W. Yao, H. Zhao, F. Davoine, H. Zha, Learning lane change trajectories from on-road driving data, in: *2012 IEEE Intelligent Vehicles Symposium, IEEE*, pp. 885–890.
- Y. LeCun, Y. Bengio, G. Hinton, *Deep learning*, *nature* 521 (2015) 436.
- Y. Wu, J. Lim, M.-H. Yang, Online object tracking: A benchmark, in: *Proceedings of the IEEE conference on computer vision and pattern recognition*, pp. 2411–2418.